

Celest



From Waste to Wonder – a Lamp Made from Re- cycled Metal Scrap from Johanson's Production

Discover CELEST, a sleek and sustainable lamp that combines innovative design with environmental awareness. Made from pipe parts from furniture production and featuring a smart reuse strategy, CELEST uses leftover material from metalworking to create a unique and aesthetically appealing lighting solution.

CELEST is available in three elegant sizes – S, M, and L – as well as in a round triple and a straight triple design, making it perfect for any space and interior

style. For those seeking even more flexibility, we also offer a round quintuple, which is also available in a straight version.

Inspired by Noon's core concept, CELEST gives you the option to choose from around 200 RAL colors and a selection of textile cable colors. Create your own unique CELEST and customize it to match your personal style. Let CELEST be more than just a lamp – let it be a work of art that lights up your home with both warmth and character.

NOON


Noon Light AB

Showroom & Huvudkontor
Blekingegatan 22 — 118 56 Stockholm — Sweden
Anders Anderssons väg 7 — 283 35 Markaryd — Sweden

Telefon +46 433 56 91 00 — E-post info@noonlight.se
www.noonlight.se

Celest

Celest 1

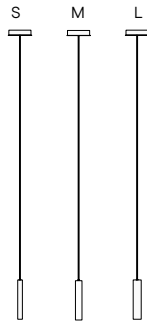

PRODUCT SPECIFICATIONS


Celest 1 Round	Each in any size S(Ø3 cm), M(Ø4 cm) and L(Ø5 cm)
Product category	Pendant lighting
Field of application	Indoors
Material	Lampshade in machined aluminum, cable in tightly woven textile sleeve.
Ceiling cup	Ceiling cup in machined aluminum, Ø15 cm incl. driver 3W
Cable and wire length	1800 mm, Extra length of textile cable can be purchased per meter.
Light source	Integrerad LED (interchangeable)
Dimmable	Yes, dimmable via phase dimmer (transistor dimmer)
Dimensions	S Ø3x25 cm, M Ø4x25 cm, LØ5x25 cm
Weight	1kg

TECHNICAL SPECIFICATIONS

Voltage	220-240V
Frequency	50/60HZ
IP-class	IP20
Light souce	Integrerad LED (interchangeable)
Protection class	Klass II
Watt	Watt 3W
Lumen	420 lm
Light colour (Kelvin)	3000K
Light colour tolerance (SDCM)	3 McAdams steps
Lifespan (L70)	50.000 hours
Color rendering (CRI)	> 90
Light distribution	12–60°
General Stand. and Cert.	CE-LVD / CE-EMC / RoHS

Celest

Celest 3

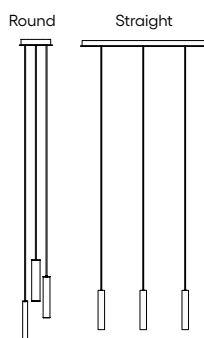

PRODUCT SPECIFICATIONS


Celest 3 Round	One of each size S(Ø3 cm), M(Ø4 cm) and L(Ø5 cm)
Celest 3 Straight	3 pcs in any size S(Ø3 cm), M(Ø4 cm) or L(Ø5 cm)
Product category	Pendant lighting
Field of application	Indoors
Material	Lampshade in machined aluminum, cable in tightly woven textile sleeve.
Ceiling cup	Ceiling cup in machined aluminum, Ø20 cm alt. 80 x 10,5 cm incl. driver 12W
Cable and wire length	1800 mm, Extra length of textile cable can be purchased per meter.
Light source	Integrerad LED (interchangeable) incl. drivers 13.7 W
Dimmable	Yes, dimmable via phase dimmer (transistor dimmer)
Dimensioner Round	S Ø3x25 cm, M Ø4x25 cm, LØ5x25 cm, Ceiling cup Ø20 cm
Dimensioner Straight	S Ø3x25 cm, M Ø4x25 cm, LØ5x25 cm, Ceiling cup 80 x 10,5 cm
Weight	3kg

TECHNICAL SPECIFICATIONS

Voltage	220-240V
Frequency	50/60HZ
IP-class	IP20
Light source	Integrerad LED (interchangeable)
Protection class	Klass II
Watt	12W
Lumen	420 lm
Light colour (Kelvin)	3000K
Light colour tolerance (SDCM)	3 McAdams steps
Lifespan (L70)	50.000 hours
Color rendering (CRI)	> 90
Light distribution	12-60°
General Stand. and Cert.	CE-LVD / CE-EMC / RoHS

Celest

Celest 5

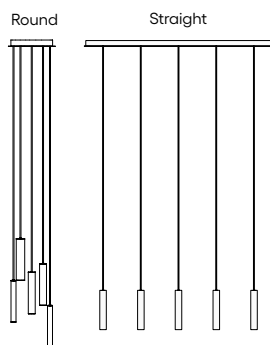

PRODUCT SPECIFICATIONS

Celest 5 Round	2 pcs S(Ø3 cm), 2 pcs M(Ø4 cm) and 1 pcs L(Ø5 cm)
Celest 5 Straight	5 pcs in any size S(Ø3 cm), M(Ø4 cm) or L(Ø5 cm)
Product category	Pendant lighting
Field of application	Indoors
Material	Lampshade in machined aluminum, cable in tightly woven textile sleeve.
Ceiling cup	Ceiling cup in machined aluminum, Ø28 cm alt. 120 x 10,5 cm incl. driver 20W
Cable and wire length	1800 mm, Extra length of textile cable can be purchased per meter.
Light source	Integrerad LED (interchangeable)
Dimmable	Yes, dimmable via phase dimmer (transistor dimmer)
Dimensioner Round	S Ø3x25 cm, M Ø4x25 cm, LØ5x25 cm, Ceiling cup Ø28 cm
Dimensioner Straight	S Ø3x25 cm, M Ø4x25 cm, LØ5x25 cm, Ceiling cup 120 x 10,5 cm
Weight	5kg


TECHNICAL SPECIFICATIONS

Voltage	220-240V
Frequency	50/60HZ
IP-class	IP20
Light source	Integrerad LED (interchangeable)
Protection class	Klass II
Watt	20W
Lumen	420 lm
Light colour (Kelvin)	3000K
Light colour tolerance (SDCM)	3 McAdams steps
Lifespan (L70)	50.000 hours
Color rendering (CRI)	> 90
Light distribution	12–60°
General Stand. and Cert.	CE-LVD / CE-EMC / RoHS


Celest



The LED module in each lamp can be adjusted in height using a set screw on the textile cable. This allows for different functions

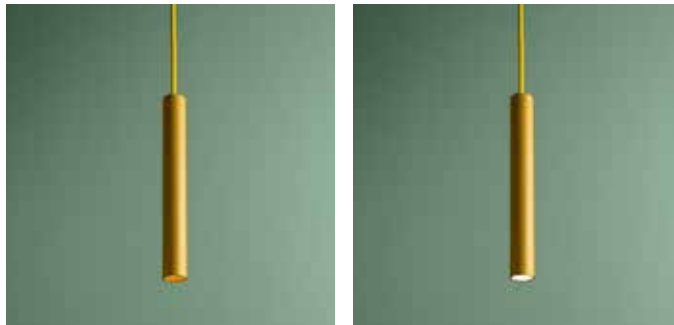

LED module placed higher up in the tube - focused spot
LED module placed at the bottom of the tube - wide-beam spot

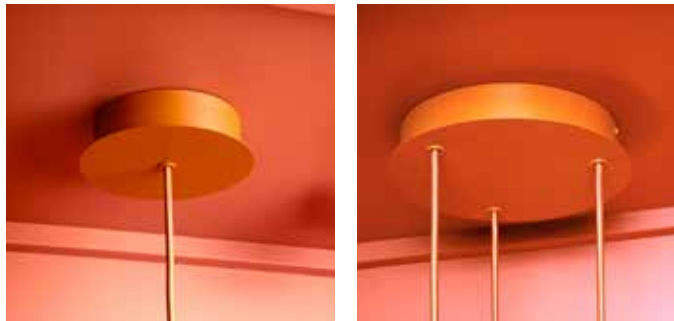

Ceiling cup Celest 1 Ceiling cup Celest 3-Round



Choose from 200
different colours,
textile cable: 60
colors